



Filter drier, shell

DCR / DCRE

Danfoss ELIMINATOR® filter drier with replaceable solid core. Designed for applications requiring high moisture capacity and acid adsorption capacity

Description

Danfoss ELIMINATOR® filter driers with replaceable solid core, type DCR, are for use in liquid and / or suction lines in refrigeration, freezing and air-conditioning systems.

Besides being able to meet the demanding requirements of high working pressure levels when operating with R410A thanks to replaceable solid cores the DCR programme offers flexibility with respect to different applications.

Available with copper connections. DCRE programme offers to be used with flammable refrigerants A2L, Group .

Features & benefits


- DCR / DCRE housing:
 - PED approved for PS up to 46 bar for the DCR and up to 50 bar for DCRE
 - DCR / DCRE housing (including core holder) are made entirely of steel and are thus compatible with all refrigerants
 - DCR / DCRE housings have undergone phosphate pre-treatment and have a corrosion-resistant powder-paint finish
 - DCR / DCRE housings are helium leak tested
 - DCR / DCRE housings are allow to be used with CO₂
- Top covers for DCR / DCRE housings:
 - Zinc-chromated steel top covers with or without external access connection
- Inserts for DCR housings - strainer 48 - F strainer - compatible with all refrigerants:
 - Retains dirt particles larger than 15 µm
 - For use direct in DCR housings
 - Utilised in the suction or liquid line
- Inserts for DCR housings - solid cores
 - 48 - DM - 100% molecular sieve solid core suitable for HFC refrigerants: Provides high moisture adsorption at low and high condensing temperatures and effective protection against impurities
 - 48 - DC - 80% molecular sieve and 20% activated alumina solid core suitable for HCFC refrigerants and compatible with HFC refrigerants: Adsorbs moisture and acid in the system throughout the entire temperature range
 - 48 - DA - 30% molecular sieve and 70% activated alumina solid core suitable after compressor burnout and compatible with HCFC / HFC refrigerants: Inserts for DCRE housings - solid cores:
 - 48 - DM
 - 48 - DC
 - All solid cores have an optimised uniform grain size ensuring effective dirt removal and low pressure drop. The robust solid cores withstand pressure surge and vibration. Inserts are compatible with the wide range of refrigerants, including CO₂

Applications

Danfoss ELIMINATOR® filter driers with replaceable solid core, type DCR / DCRE, protect refrigeration, freezing and air-conditioning systems from moisture, acids, and solid particles.

With these contaminants eliminated, systems are safer from harmful chemical reactions and from abrasive impurities.

Figure: Applications

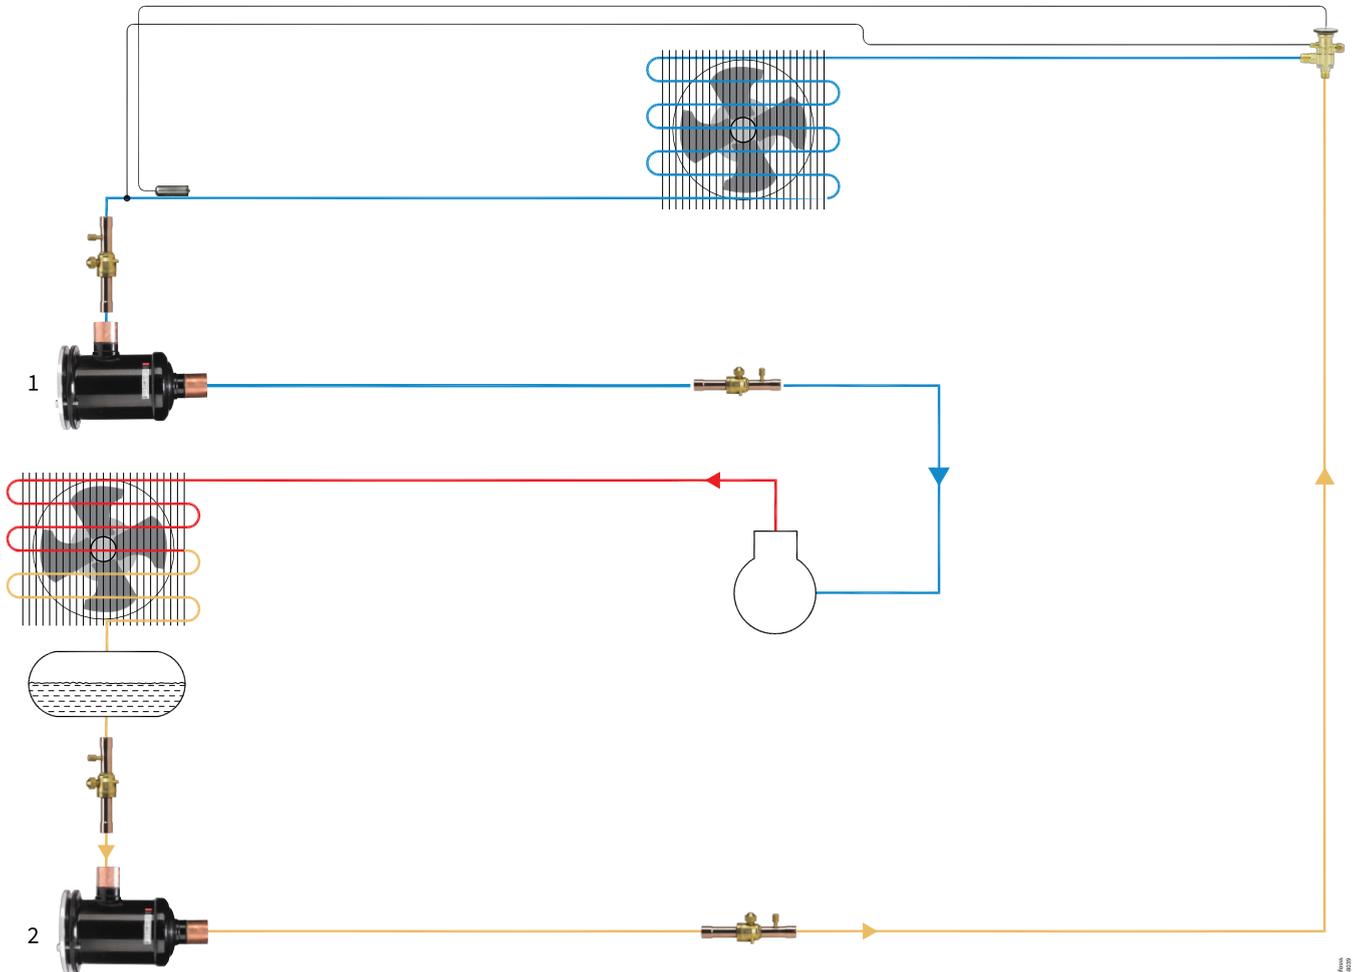

Danfoss
164-1-0219

1	DCR, suction line filter drier
2	DCR / DCRE, liquid line filter drier

Ordering

Product code numbers

DCR/DCRE housing and insert are ordered separately. Select housing and top cover with all internal parts assembled from table 1,2 or 3 and required number of inserts from table 4.

Figure: DCR

Danfoss
23M77

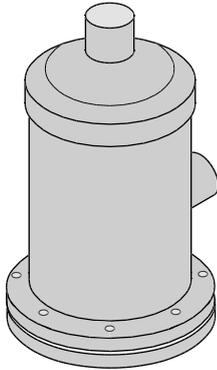


Table: DCR Housing with copper connectors + top cover

Type	Number of cores	Copper connectors		Cover type	Max. working pressure [bar]	Code number
		Solder ODF				
		[in.]	[mm]			
DCR 0485s	1	5/8	16	Plug	46	023U7250
DCR 0487s	1	7/8	22	Plug	46	023U7251
DCR 0487s	1	7/8	22	–	46	023U7571
DCR 0489s	1	–	28	Plug	46	023U7252
DCR 0489s	1	1 1/8	–	Plug	46	023U7253
DCR 0489s	1	–	28	–	46	023U7268
DCR 04811s	1	1 3/8	35	Plug	46	023U7254
DCR 04813s	1	1 5/8	–	Plug	46	023U7255
DCR 04813s	1	–	42	Plug	46	023U7256
DCR 04813s	1	–	42	–	46	023U7303
DCR 04817s	1	2 1/8	54	Plug	46	023U7257
DCR 04821s	1	2 5/8	–	Plug	46	023U7276
DCR 0967s	2	7/8	22	Plug	46	023U7258
DCR 0969s	2	–	28	Plug	46	023U7259
DCR 0969s	2	1 1/8	–	Plug	46	023U7260
DCR 0969s	2	1 1/8	–	–	46	023U7278
DCR 09611s	2	1 3/8	35	Plug	46	023U7261
DCR 09613s	2	1 5/8	–	Plug	46	023U7262
DCR 09613s	2	–	42	Plug	46	023U7263
DCR 09613s	2	–	42	–	46	023U7463
DCR 09617s	2	2 1/8	54	Plug	46	023U7264
DCR 09617s	2	2 1/8	54	–	46	023U7290
DCR 09621s	2	2 5/8	–	Plug	46	023U7281
DCR 1449s	3	–	28	Plug	35 ⁽¹⁾ / 46 ⁽²⁾	023U7265
DCR 14411s	3	1 3/8	35	Plug	35 ⁽¹⁾ / 46 ⁽²⁾	023U7267

DCR 14411s	3	1 3/8	–	–	35 ⁽¹⁾ / 46 ⁽²⁾	023U7275
DCR 14413s	3	1 5/8	–	Plug	35 ⁽¹⁾ / 46 ⁽²⁾	023U7282
DCR 14413s	3	–	42	Plug	35 ⁽¹⁾ / 46 ⁽²⁾	023U7269
DCR 14413s	3	1 5/8	42	–	35 ⁽¹⁾ / 46 ⁽²⁾	023U7297
DCR 14417s	3	2 1/8	54	Plug	35 ⁽¹⁾ / 46 ⁽²⁾	023U7270
DCR 19211s	4	1 3/8	–	–	28 ⁽¹⁾ / 40 ⁽²⁾	023U7083
DCR 19213s	4	1 5/8	–	Plug	28 ⁽¹⁾ / 40 ⁽²⁾	023U7272
DCR 19213s	4	–	42	Plug	28 ⁽¹⁾ / 40 ⁽²⁾	023U7273
DCR 19213s	4	1 5/8	–	–	28 ⁽¹⁾ / 40 ⁽²⁾	023U7082
DCR 19217s	4	2 1/8	54	Plug	28 ⁽¹⁾ / 40 ⁽²⁾	023U7274

⁽¹⁾ For usage with strainer or as a receiver application

⁽²⁾ For "drier" application using all the permissible cores

Figure: DCR

Danfoss
23M77

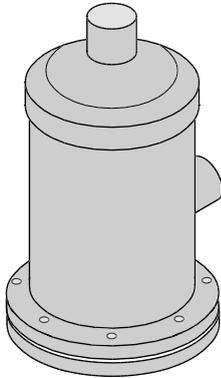


Table: DCR Housing with steel connectors + top cover

Type	Number of cores	Steel connectors			Cover type	Max. working pressure PS [bar]	Code number
		Solder ODF		Butt weld [in.]			
		[in.]	[mm]				
DCR 0485	1	5/8	16	1/2	Plug	46	023U7050
DCR 0487	1	7/8	22	3/4	Plug	46	023U7051
DCR 0487	1	7/8	22	3/4	–	46	023U7151
DCR 0489	1	–	28	1	Plug	46	023U7052
DCR 0489	1	1 1/8	–	1	Plug	46	023U7053
DCR 04811	1	1 3/8	35	1 1/4	Plug	46	023U7054
DCR 04813	1	1 5/8	–	1 1/2	Plug	46	023U7055
DCR 04813	1	–	42	1 1/2	Plug	46	023U7056
DCR 04817	1	2 1/8	54	2	Plug	46	023U7057
DCR 04821	1	2 5/8	–	2 1/2	Plug	46	023U7076
DCR 0967	2	7/8	22	3/4	Plug	46	023U7058
DCR 0969	2	–	28	1	Plug	46	023U7059
DCR 0969	2	1 1/8	–	1	Plug	46	023U7060
DCR 09611	2	1 3/8	35	1 1/4	Plug	46	023U7061
DCR 09611	2	1 3/8	35	1 1/4	–	46	023U7161
DCR 09613	2	1 5/8	–	1 1/2	Plug	46	023U7062
DCR 09613	2	–	42	1 1/2	Plug	46	023U7063
DCR 09617	2	2 1/8	54	2	Plug	46	023U7064
DCR 1449	3	–	28	1	Plug	35 ⁽¹⁾ / 46 ⁽²⁾	023U7065

DCR 1449	3	1 ½	–	1	Plug	35 ⁽¹⁾ / 46 ⁽²⁾	023U7066
DCR 14411	3	1 ¾	35	1 ¼	Plug	35 ⁽¹⁾ / 46 ⁽²⁾	023U7067
DCR 14413	3	1 ½	–	1 ½	Plug	35 ⁽¹⁾ / 46 ⁽²⁾	023U7068
DCR 14413	3	–	42	1 ½	Plug	35 ⁽¹⁾ / 46 ⁽²⁾	023U7069
DCR 14417	3	2 ½	54	2	Plug	35 ⁽¹⁾ / 46 ⁽²⁾	023U7070
DCR 19211	4	1 ¾	35	1 ¼	Plug	28 ⁽¹⁾ / 40 ⁽²⁾	023U7071
DCR 19213	4	1 ½	–	1 ½	Plug	28 ⁽¹⁾ / 40 ⁽²⁾	023U7072
DCR 19213	4	–	42	1 ½	Plug	28 ⁽¹⁾ / 40 ⁽²⁾	023U7073
DCR 19217	4	2 ½	54	2	Plug	28 ⁽¹⁾ / 40 ⁽²⁾	023U7074
DCR 19221	4	2 ⅝	–	2 ½	Plug	28 ⁽¹⁾ / 40 ⁽²⁾	023U7086

⁽¹⁾ For usage with strainer or as a receiver application

⁽²⁾ For "drier" application using all the permissible cores

Figure: DCRE

Danfoss
23M77

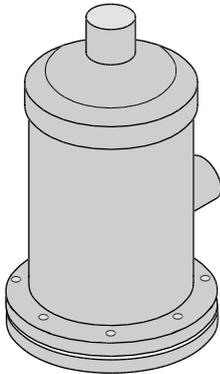


Table: DCRE Housing with copper connectors + top cover

Type	Number of cores	Copper connectors solder		Cover	Maximum working pressure PS [bar]	Code number
		[in]	[mm]			
DCRE 0485s	1	5/8	16	plug	50	023U7608
DCRE 0487s	1	7/8	22	plug	50	023U7606
DCRE 0489s	1	1 ½	–	plug	50	023U7607
DCRE 0489s	1	–	28	plug	50	023U7609
DCRE 04811s	1	1 ¾	35	plug	50	023U7610
DCRE 04813s	1	1 ⅝	41	plug	50	023U7611

Figure: DCR insert

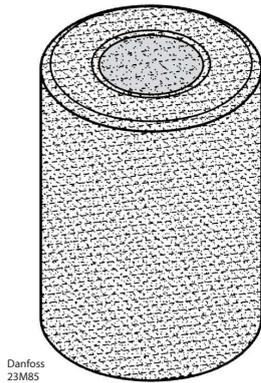


Figure: DCRE insert

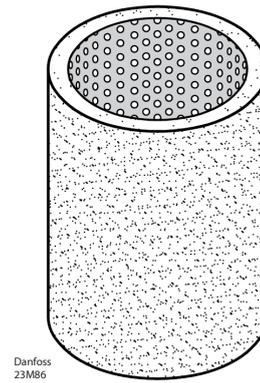


Table: Type DCR/DCRE, inserts

Type	Material	Code number for DCR		Code number for DCRE	
		Industrial pack		Multi pack	
		(8 pcs.)		(3 pcs.)	
		with gasket ⁽²⁾	without gasket	with gasket ⁽²⁾	with gasket ⁽²⁾
48-DM solid core ⁽¹⁾	100% molecular sieve	023U1392	023U1393	023U1391	023U1399
48-DC solid core ⁽¹⁾	80% molecular sieve & 20% Al ₃ O ₂	023U4381	023U4382	023U4380	023U4388
48-DA solid core ⁽¹⁾	30% molecular sieve & 70% Al ₃ O ₂	023U5381	023U5382	023U5380	-
48-F strainer ⁽¹⁾	Felt-gasket, 15 µm	023U1921	-	-	-
100-DM solid core ⁽³⁾	100% molecular sieve	023U7562	-	-	-
100-DC solid core ⁽³⁾	80% molecular sieve & 20% Al ₃ O ₂	023U7563	-	-	-

⁽¹⁾ Only use for DCR 048 - 192 housing


⁽²⁾ Top cover gasket

⁽³⁾ Only use for DCR 300 and DCR 400


Table: Core surface and volume

Core	surface	volume
	[cm ²]	[cm ³]
DM 048, DC 048 and DA 048	612	727
DM 096, DC 096 and DA 096	1225	1454
DM 144, DC 144 and DA 144	1837	2181
DM 192, DC 192 and DA 192	2450	2908
48-F	405	-

Functions

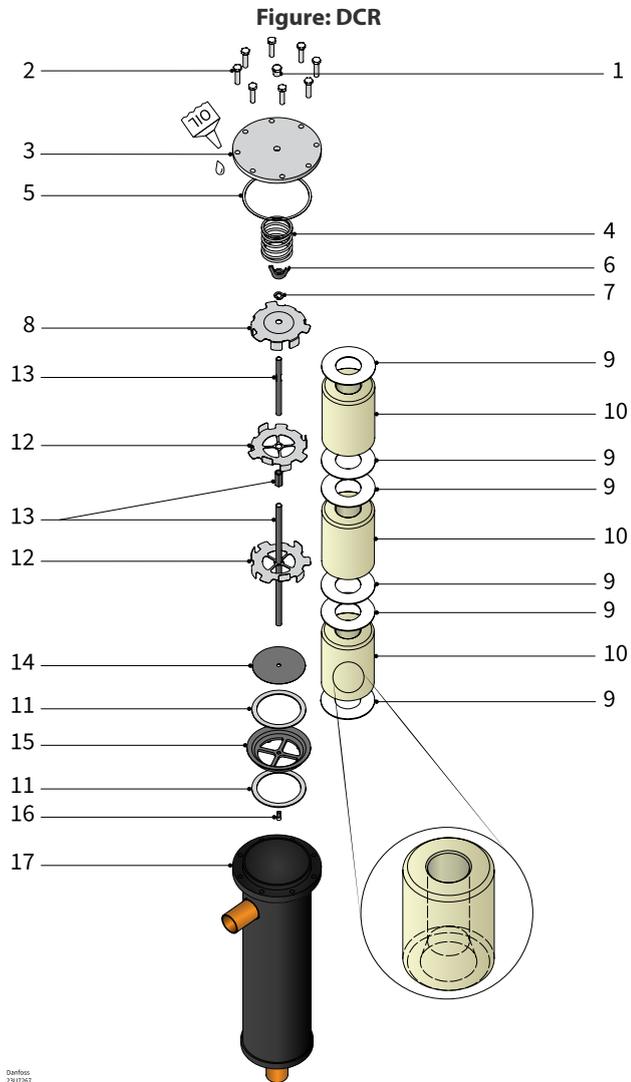

Danfoss
2327607

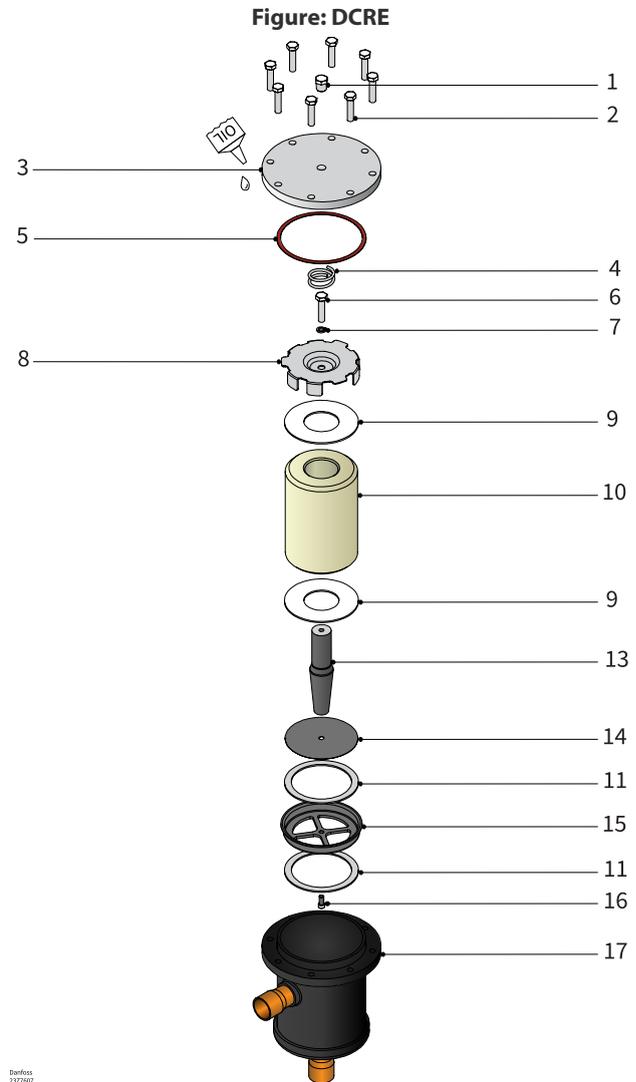

Danfoss
2327607

1	Plug for cover
2	Bolts for cover
3	Top cover
4	Spring
5	Top cover gasket
6	Wing nut (DCR) / Bolt (DCRE)
7	Lock washer
8	Top plate
9	Core felt gasket

10	Solid core
11	Core holder felt gasket
12	Core plate
13	Distance rod
14	Wire mesh
15	Core holder
16	Hex socket head screw
17	Shell

Inner taper of core should always face towards filter outlet. This apply for DCR and DCRE components.

NOTE:

The DCRE can only be use for A2L when the solid core is placed. DCRE is not allowed to be used as receiver.

Product details

General data

Table: Technical data

Type	Maximum working pressure PS [bar]	Temperature range ⁽³⁾ [°C]
DCR 048	46	- 40 – 70
DCR 096	46	- 40 – 70
DCR 144	35 ⁽¹⁾ / 46 ⁽²⁾	- 40 – 70
DCR 192	28 ⁽¹⁾ / 40 ⁽²⁾	- 40 – 70
DCRE 048	50	- 40 – 70

⁽¹⁾ For usage with strainer or as a receiver application

⁽²⁾ For "drier" application using all the permissible cores

Capacity

Table: DCR Drying and liquid capacity, type 48-DM

Type	No. of cores	Drying capacity [kg refrigerant] ⁽¹⁾										Max. working pressure
		R134a		R404A		R507		R407C		R410A		
		[°C]										PS
		24	52	24	52	24	52	24	52	24	52	[bar]
DCR 0485	1	83.4	76.4	86.9	82.3	91	81.9	81	74.7	75.5	67.2	46
DCR 0487	1	83.4	76.4	86.9	82.3	91	81.9	81	74.7	75.5	67.2	46
DCR 0489	1	83.4	76.4	86.9	82.3	91	81.9	81	74.7	75.5	67.2	46
DCR 04811	1	83.4	76.4	88.7	82.3	91	81.9	81	74.7	75.5	67.2	46
DCR 04813	1	83.4	76.4	86.9	82.3	91	81.9	81	74.7	75.5	67.2	46
DCR 04817	1	83.4	76.4	86.9	82.3	91	81.9	81	74.7	75.5	67.2	46
DCR 04821	1	83.4	76.4	86.9	82.3	91	81.9	81	74.7	75.5	67.2	46
DCR 0967	2	166.8	152.8	173.8	164.6	182	163.8	162	149.4	151	134.4	46
DCR 0969	2	166.8	152.8	173.8	164.6	182	163.8	162	149.4	151	134.4	46
DCR 09611	2	166.8	152.8	173.8	164.6	182	163.8	162	149.4	151	134.4	46
DCR 09613	2	166.8	152.8	173.8	164.6	182	163.8	162	149.4	151	134.4	46
DCR 09617	2	166.8	152.8	173.8	164.6	182	163.8	162	149.4	151	134.4	46
DCR 1449	3	250.2	229.2	260.7	246.9	273	245.7	243	224.1	226.5	201.6	35 ⁽³⁾ / 46 ⁽⁴⁾
DCR 14411	3	250.2	229.2	260.7	246.9	273	245.7	243	224.1	226.5	201.6	35 ⁽³⁾ / 46 ⁽⁴⁾
DCR 14413	3	250.2	229.2	260.7	246.9	273	245.7	243	224.1	226.5	201.6	35 ⁽³⁾ / 46 ⁽⁴⁾
DCR 14417	3	250.2	229.2	260.7	246.9	273	245.7	243	224.1	226.5	201.6	35 ⁽³⁾ / 46 ⁽⁴⁾
DCR 19211	4	333.6	305.6	347.6	329.2	364	327.6	324	298.8	302	268.8	28 ⁽³⁾ / 40 ⁽⁴⁾
DCR 19213	4	333.6	305.6	347.6	329.2	364	327.6	324	298.8	302	268.8	28 ⁽³⁾ / 40 ⁽⁴⁾
DCR 19217	4	333.6	305.6	347.6	329.2	364	327.6	324	298.8	302	268.8	28 ⁽³⁾ / 40 ⁽⁴⁾
DCR 19221	4	333.6	305.6	347.6	329.2	364	327.6	324	298.8	302	268.8	28 ⁽³⁾ / 40 ⁽⁴⁾

⁽¹⁾ Drying capacity is based on following moisture content test standards before and after drying:

- R134a: 1050 – 50 ppm W
- R404A, R507: 1020 – 50 ppm W
- R407C: 1020 – 50 ppm W
- R410A: 1050 – 50 ppm W
- R22: 1050 – 60 ppm.

In accordance with ARI 710-2004

⁽³⁾ For usage with strainer or as a receiver application

⁽⁴⁾ Refrigerants other than specified in the table please contact Danfoss for the approval.

Type	No. of cores	Liquid capacity [kW] ⁽²⁾					Max. working pressure
		R134a	R404A	R507	R407C	R410A	PS
							[bar]
DCR 0485	1	67	47.1	45.7	68.7	69.7	46
DCR 0487	1	127	89.3	86.6	130.1	132.1	46
DCR 0489	1	165	116	112.6	169.1	171.7	46
DCR 04811	1	205	144.2	139.8	210.1	213.3	46
DCR 04813	1	230.3	162	157.1	236	239.6	46
DCR 04817	1	250.1	175.9	170.6	256.3	260.2	46
DCR 04821	1	255	179.3	174	261.3	265.4	46
DCR 0967	2	134	94.3	91.4	137.4	139.5	46
DCR 0969	2	212.3	149.3	144.8	217.6	220.9	46
DCR 09611	2	216.9	152.6	148	222.3	225.7	46
DCR 09613	2	294.9	207.4	201.1	302.2	306.8	46
DCR 09617	2	358	251.8	244.2	366.9	372.5	46
DCR 1449	3	222.2	156.3	151.6	227.7	231.2	35 ⁽³⁾ / 46 ⁽⁴⁾
DCR 14411	3	225.7	158.8	154	231.3	234.9	35 ⁽³⁾ / 46 ⁽⁴⁾
DCR 14413	3	355.9	250.3	242.8	364.7	370.3	35 ⁽³⁾ / 46 ⁽⁴⁾
DCR 14417	3	355.9	250.3	242.8	364.7	370.3	35 ⁽³⁾ / 46 ⁽⁴⁾
DCR 19211	4	371.7	261.4	253.6	381	386.8	28 ⁽³⁾ / 40 ⁽⁴⁾
DCR 19213	4	459.9	323.5	313.7	471.4	478.6	28 ⁽³⁾ / 40 ⁽⁴⁾
DCR 19217	4	459.9	323.5	313.7	471.4	478.6	28 ⁽³⁾ / 40 ⁽⁴⁾
DCR 19221	4	459.9	323.5	313.7	471.4	478.6	28 ⁽³⁾ / 40 ⁽⁴⁾

⁽²⁾ Given in accordance with ARI 710-2004 for:

- $t_e = -15\text{ °C}$
- $t_c = 30\text{ °C}$
- $\Delta p = 0.07\text{ bar}$

⁽³⁾ For usage with strainer or as a receiver application

⁽⁴⁾ Refrigerants other than specified in the table please contact Danfoss for the approval.

Table: DCR Drying and liquid capacity, type 48-DC

Type	No. of cores	Drying capacity [kg refrigerant] ⁽¹⁾										Max. working pressure
		R134a		R404A		R507		R407C		R410A		PS
		[°C]										PS
		24	52	24	52	24	52	24	52	24	52	[bar]
DCR 0485	1	65.5	59.9	68.2	64.6	71.4	64.3	63.6	58.6	59.3	52.7	46
DCR 0487	1	65.5	59.9	68.2	64.6	71.4	64.3	63.6	58.6	59.3	52.7	46
DCR 0489	1	65.5	59.9	68.2	64.6	71.4	64.3	63.6	58.6	59.3	52.7	46
DCR 04811	1	65.5	59.9	68.2	64.6	71.4	64.3	63.6	58.6	59.3	52.7	46
DCR 04813	1	65.5	59.9	68.2	64.6	71.4	64.3	63.6	58.6	59.3	52.7	46
DCR 04817	1	65.5	59.9	68.2	64.6	71.4	64.3	63.6	58.6	59.3	52.7	46
DCR 04821	1	65.5	59.9	68.2	64.6	71.4	64.3	63.6	58.6	59.3	52.7	46
DCR 0967	2	131	119.8	136.4	129.2	142.8	128.6	126.6	117.2	118.6	105.4	46
DCR 0969	2	131	119.8	136.4	129.2	142.8	128.6	126.6	117.2	118.6	105.4	46
DCR 09611	2	131	119.8	136.4	129.2	142.8	128.6	126.6	117.2	118.6	105.4	46
DCR 09613	2	131	119.8	136.4	129.2	142.8	128.6	126.6	117.2	118.6	105.4	46
DCR 09617	2	131	119.8	136.4	129.2	142.8	128.6	126.6	117.2	118.6	105.4	46
DCR 1449	3	196.5	179.7	204.6	193.8	214.2	192.9	189.9	175.8	177.9	158.1	35 ⁽³⁾ / 46 ⁽⁴⁾
DCR 14411	3	196.5	179.7	204.6	193.8	214.2	192.9	189.9	175.8	177.9	158.1	35 ⁽³⁾ / 46 ⁽⁴⁾
DCR 14413	3	196.5	179.7	204.6	193.8	214.2	192.9	189.9	175.8	177.9	158.1	35 ⁽³⁾ / 46 ⁽⁴⁾
DCR 14417	3	196.5	179.7	204.6	193.8	214.2	192.9	189.9	175.8	177.9	158.1	35 ⁽³⁾ / 46 ⁽⁴⁾
DCR 19211	4	262	239.6	272.8	258.4	285.6	257.2	253.2	234.4	237.2	210.8	28 ⁽³⁾ / 40 ⁽⁴⁾
DCR 19213	4	262	239.6	272.8	258.4	285.6	257.2	253.2	234.4	237.2	210.8	28 ⁽³⁾ / 40 ⁽⁴⁾

DCR 19217	4	262	239.6	272.8	258.4	285.6	257.2	253.2	234.4	237.2	210.8	28 ⁽³⁾ /40 ⁽⁴⁾
DCR 19221	4	262	239.6	272.8	258.4	285.6	257.2	253.2	234.4	237.2	210.8	28 ⁽³⁾ /40 ⁽⁴⁾

⁽¹⁾ Drying capacity is based on following moisture content test standards before and after drying:

- R134a: 1050 – 50 ppm W
- R404A, R507: 1020 – 50 ppm W
- R407C: 1020 – 50 ppm W
- R410A: 1050 – 50 ppm W
- R22: 1050 – 60 ppm

In accordance with ARI 710-2004

⁽³⁾ For usage with strainer or as a receiver application

⁽⁴⁾ Refrigerants other than specified in the table please contact Danfoss for the approval.

Type	No. of cores	Liquid capacity [kW] ⁽²⁾					Max. working pressure
		R134a	R404A	R507	R407C	R410A	PS
							[bar]
DCR 0485	1	67	47.1	45.7	68.7	69.7	46
DCR 0487	1	127	89.3	86.6	130.1	132.1	46
DCR 0489	1	165	116	112.6	169.1	171.7	46
DCR 04811	1	205	144.2	139.8	210.1	213.3	46
DCR 04813	1	230.3	162	157.1	236	239.6	46
DCR 04817	1	250.1	175.9	170.6	256.3	260.2	46
DCR 04821	1	255	179.3	174	261.3	265.4	46
DCR 0967	2	134	94.3	91.4	137.4	139.5	46
DCR 0969	2	212.3	149.3	144.8	217.6	220.9	46
DCR 09611	2	216.9	152.6	148	222.3	225.7	46
DCR 09613	2	294.9	207.4	201.1	302.2	306.8	46
DCR 09617	2	358	251.8	244.2	366.9	372.5	46
DCR 1449	3	222.2	156.3	151.6	227.7	231.2	35 ⁽³⁾ /46 ⁽⁴⁾
DCR 14411	3	225.7	158.8	154	231.3	234.9	35 ⁽³⁾ /46 ⁽⁴⁾
DCR 14413	3	355.9	250.3	242.8	364.7	370.3	35 ⁽³⁾ /46 ⁽⁴⁾
DCR 14417	3	355.9	250.3	242.8	364.7	370.3	35 ⁽³⁾ /46 ⁽⁴⁾
DCR 19211	4	371.7	261.4	253.6	381	386.8	28 ⁽³⁾ /40 ⁽⁴⁾
DCR 19213	4	459.9	323.5	313.7	471.4	478.6	28 ⁽³⁾ /40 ⁽⁴⁾
DCR 19217	4	459.9	323.5	313.7	471.4	478.6	28 ⁽³⁾ /40 ⁽⁴⁾
DCR 19221	4	459.9	323.5	313.7	471.4	478.6	28 ⁽³⁾ /40 ⁽⁴⁾

⁽²⁾ Given in accordance with ARI 710-2004 for:

- $t_e = -15\text{ °C}$
- $t_c = 30\text{ °C}$
- $\Delta p = 0.07\text{ bar}$

⁽³⁾ For usage with strainer or as a receiver application

⁽⁴⁾ Refrigerants other than specified in the table please contact Danfoss for the approval.

Table: Recommended plant capacity in suction line - burn-out, type 48-DA

Type	Recommended plant capacity [kW]											
	Evaporating temperature t_e [°C]											
	-40	-20	4.4	-30	-20	4.4	-40	-20	4.4	-40	-20	4.4
	Pressure drop Δp [bar]											
	0.04	0.1	0.21	0.04	0.07	0.14	0.04	0.1	0.21	0.04	0.1	0.21
R22 / R407C			R134a			R404A / R507			R410A			
DCR 0485	3.1	8.9	21	3	5.4	13	2.4	7.1	17.5	3.1	8.9	21
DCR 0487	5.8	16.1	37.8	5.6	9.9	23.4	4.5	12.9	31.2	5.8	16.1	37.8
DCR 0489	7.8	21.6	50.7	7.5	13.3	31.5	6	17.2	41.8	7.8	21.6	50.7
DCR 04811	10	27.3	63.3	9.6	16.8	39.5	7.7	21.8	51.9	10	27.3	63.3
DCR 04813	10	27.3	63.3	9.6	16.8	39.5	7.7	21.8	51.9	10	27.3	63.3
DCR 04817	10	27.3	63.3	9.6	16.8	39.5	7.7	21.8	51.9	10	27.3	63.3
DCR 04821	10	27.3	63.3	9.6	16.8	39.5	7.7	21.8	51.9	10	27.3	63.3
DCR 0965	3.3	9.1	21.4	3.2	5.7	13.4	2.5	7.4	18	3.3	9.2	21.6
DCR 0967	5.8	16.2	38.1	5.6	9.9	23.6	4.5	12.9	31.4	5.8	16.2	38.1
DCR 0969	8.7	24.6	58.3	8.4	15	35.9	6.8	19.7	48.1	8.7	24.6	58.3
DCR 09611	11.9	33.4	79.3	11.4	20.4	48.9	9.3	26.8	65.4	11.9	33.4	79.3
DCR 09613	14.1	39.9	95.2	13.6	24.3	58.5	11	32	78.7	14.1	39.9	95.2
DCR 09617	14.1	39.9	95.2	13.6	24.3	58.5	11	32	78.7	14.1	39.9	95.2
DCR 09621	14.1	39.9	95.2	13.6	24.3	58.5	11	32	78.7	14.1	39.9	95.2
DCR 1445	3.5	10	22.8	3.4	6	14	2.7	7.7	18.9	3.5	10	22.8
DCR 1447	6.6	18.9	42.9	6.3	11.2	26.4	5.1	14.5	35.6	6.6	18.9	42.9
DCR 1449	8.8	25.1	57.2	8.4	15	35.2	6.8	19.4	47.5	8.8	25.1	57.2
DCR 14411	13.2	38.1	92.2	12.7	23	56.2	10.3	30.7	76.6	13.2	38.1	92.2
DCR 14413	13.2	38.1	92.2	12.7	23	56.2	10.3	30.7	76.6	13.2	38.1	92.2
DCR 14417	13.2	38.1	92.2	12.7	23	56.2	10.3	30.7	76.6	13.2	38.1	92.2
DCR 14421	13.2	38.1	92.2	12.7	23	56.2	10.3	30.7	76.6	13.2	38.1	92.2
DCR 1925	4.2	11.5	27.3	4	7.1	16.8	3.2	9.2	22.7	4.2	11.5	27.3
DCR 1927	7.9	21.6	51.4	7.6	13.4	31.6	6.1	17.4	42.7	7.9	21.6	51.4
DCR 1929	10.6	28.9	68.9	10.2	18	42.1	8.2	23.3	57.2	10.6	28.9	68.9
DCR 19211	14.8	41.8	99.4	14.3	25.5	61.2	11.6	33.6	82.2	14.8	41.8	99.4
DCR 19213	18	51.1	122.1	17.4	31.1	75	14.1	41.1	101	18	51.1	122.1
DCR 19217	18	51.1	122.1	17.4	31.1	75	14.1	41.1	101	18	51.1	122.1
DCR 19221	18	51.1	122.1	17.4	31.1	75	14.1	41.1	101	18	51.1	122.1

NOTE:Data given in accordance with ARI-Standard 710-2004 for $t_e = 4.4$ °C and $t_c = 32.2$ °C**Table: DCR Drying and acid capacity, type 48-DA**

Type	No. of cores	Drying capacity [g of water] ⁽¹⁾												Acid capacity ⁽²⁾
		Evaporating temperature t_e [°C]												
		-40	-20	4.4	-30	-20	4.4	-40	-20	4.4	-40	-20	4.4	
		R22 / R407C			R134a			R404A / R507			R410A			
DCR 048	1	28	19	12	45	38	27	47	30	19	42	35	25	26.6
DCR 096	2	56	37	24	90	77	54	94	60	37	84	70	50	53.3
DCR 144	3	84	56	36	135	115	81	142	90	56	126	105	75	79.9
DCR 192	4	112	74	48	180	153	108	189	120	75	168	140	100	106.5

⁽¹⁾ Drying capacity is expressed during drying in:

- R22: EPD = 10 ppm W, corresponding to a dew point temperature = -50 °C
- R134a: EPD = 50 ppm W, corresponding to a dew point temperature = -37 °C
- R404A: EPD = 10 ppm W, corresponding to a dew point temperature = -40 °C
- R407C: EPD = 10 ppm W, corresponding to a dew point temperature = -40 °C

⁽²⁾ Adsorption capacity of oleic acid at 0.05 TAN (Total Acid Number)

Figure: Strainer

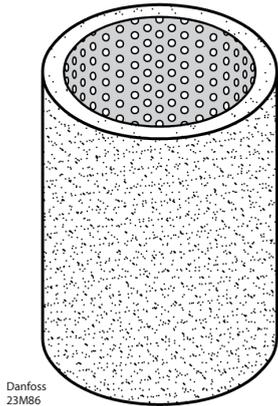


Table: Strainer mounted in suction line, type 48-F

Refrigerant	R22 / R407C			R134a			R404A / R507			R410A	
Evaporating temperature [°C]	-40	-20	4.4	-30	-20	4.4	-40	-20	4.4	-40	4.4
Pressure drop Δp [bar]	0.04	0.1	0.21	0.04	0.07	0.14	0.04	0.1	0.21	0.04	0.21
Recommended system capacity [kW]	15	47	113	15	28	69	12	38	93	15	113

Table: Strainer mounted in liquid line

Refrigerant	R22 / R407C	R134a	R404A / R507	R410A
Recommended system capacity [kW] ⁽¹⁾	390	350	260	390

⁽¹⁾ The data given apply to DCR 04811 with 48-F core.

Liquid capacity is given in accordance with ARI 710-2004 for: $t_e = -15\text{ °C}$, $t_c = 30\text{ °C}$, $\Delta p = 0.07\text{ bar}$

Table: DCRE Drying and liquid capacity, type 48-DM

Type	No of cores	Drying capacity [kg refrigerant]										Max. working pressure
		R32		R444B		R452B		R454B		R1234yf		
		[°C]										PS
		24	52	24	52	24	52	24	52	24	52	[bar]
DCRE 0485s	1	70.2	64.6	83	74.3	80.4	71.6	82.6	76.5	155.9	143.9	50
DCRE 0487s	1	70.2	64.6	83	74.3	80.4	71.6	82.6	76.5	155.9	143.9	50
DCRE 0489s	1	70.2	64.6	83	74.3	80.4	71.6	82.6	76.5	155.9	143.9	50
DCRE 04811s	1	70.2	64.6	83	74.3	80.4	71.6	82.6	76.5	155.9	143.9	50
DCRE 04813s	1	70.2	64.6	83	74.3	80.4	71.6	82.6	76.5	155.9	143.9	50

Type	No of cores	Liquid capacity [kW]					Max. working pressure
		R32	R444B	R452B	R454B	R1234yf	
							PS
							[bar]
DCRE 0485s	1	102.1	77.9	85.1	69	48.5	50
DCRE 0487s	1	221.4	138.9	184.5	149.5	105.2	50
DCRE 0489s	1	245.9	154.3	204.9	166	116.9	50
DCRE 04811s	1	312.4	196	260.4	266.6	148.5	50
DCRE 04813s	1	351	267.5	292.5	299.5	166.8	50

Table: DCRE Drying and liquid capacity, type 48-DC

Type	No of cores	Drying capacity [kg refrigerant]										Max. working pressure
		R32		R444B		R452B		R454B		R1234yf		
		[°C]										PS
		24	52	24	52	24	52	24	52	24	52	[bar]
DCRE 0485s	1	55.1	50.7	65.1	58.3	63.1	56.2	64.8	60	122.3	112.9	50
DCRE 0487s	1	55.1	50.7	65.1	58.3	63.1	56.2	64.8	60	122.3	112.9	50
DCRE 0489s	1	55.1	50.7	65.1	58.3	63.1	56.2	64.8	60	122.3	112.9	50
DCRE 04811s	1	55.1	50.7	65.1	58.3	63.1	56.2	64.8	60	122.3	112.9	50
DCRE 04813s	1	55.1	50.7	65.1	58.3	63.1	56.2	64.8	60	122.3	112.9	50

Type	No of cores	Liquid capacity [kW]					Max. working pressure
		R32	R444B	R452B	R454B	R1234yf	
							PS
							[bar]
DCRE 0485s	1	102.1	77.9	85.1	69	48.5	50
DCRE 0487s	1	221.4	138.9	184.5	149.5	105.2	50
DCRE 0489s	1	245.9	154.3	204.9	166	116.9	50
DCRE 04811s	1	312.4	196	260.4	266.6	148.5	50
DCRE 04813s	1	351	267.5	292.5	299.5	166.8	50

Core selection**Table: Core selection**

Refrigerant and oil types		DC	DM	DA
Refrigerant	HFC (R134a, R404A, R507, R407C and R410A)	Recommended	Recommended	Recommended
	HFO (R1234ze, R407F, R407A, R454C)	Recommended	Recommended	Recommended
	HCFC (R22)	Recommended	Recommended	Recommended
	R32, R444A, R444B, R445A, R446A, R447A, R451A, R452B, R454B, R455A, R1234yf	Recommended	Recommended	NA
Oil	Mineral or AB	Recommended	Recommended	Recommended
	POE or PAG, pure	Recommended	Recommended	Recommended
	POE or PAG, with additives	Not recommended ⁽¹⁾	Recommended	Recommended

⁽¹⁾DC filter driers cores contain activated alumina, which is a polar material used for acid adsorption. Many oil additives are also polar substances and can be adsorbed by the activated alumina, rendering them useless, and reducing the drier's acid capacity, though this is not harmful to the system.

Dimensions

Figure: DCR housing

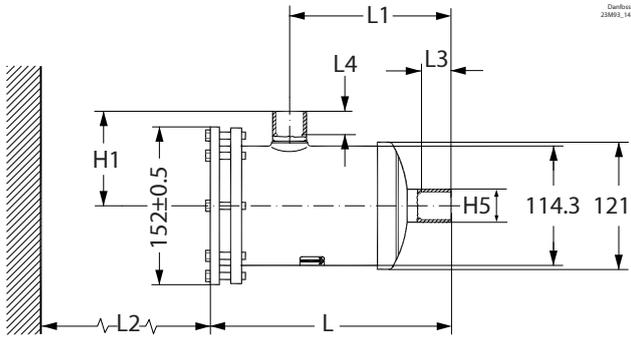


Figure: DCR top cover

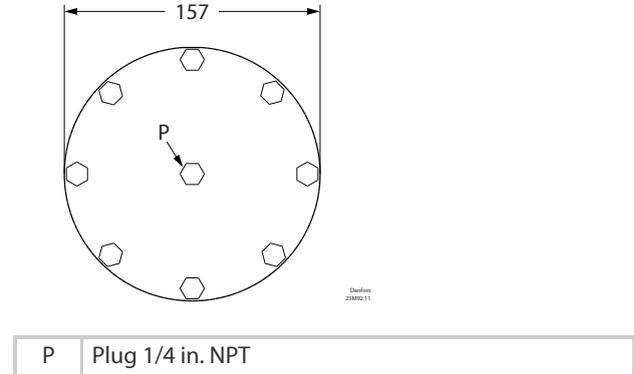


Figure: DCR solid core

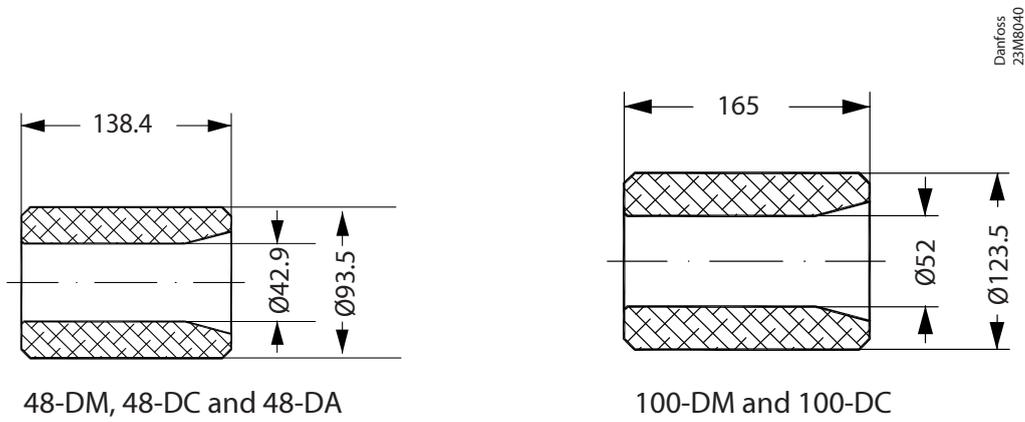


Table: Dimensions and weights for DCR

Type	No. of cores	DCR with steel connectors							DCR with copper connectors							Net weight ⁽¹⁾ [Kg]
		L	L1	L2	L3	L4	H1	H5	L	L1	L2	L3	L4	H1	H5	
		[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	
DCR 0485(s)	1	245.9	162.7	170	12	12	95.8	21	262.9	179.7	170	10	10	112.8	19	5.2
DCR 0487(s)	1	240	156.8	170	17	17	90.3	27	262.5	179.3	170	16	16	112.8	25	5.2
DCR 0489(s)	1	243.4	160.2	170	22	22	94.3	33	264.9	181.7	170	18	18	115.8	32	5.2
DCR 04811(s)	1	245.8	162.6	170	25	25	97.3	42	267.3	184.1	170	24	24	118.8	39	5.2
DCR 04813(s)	1	251	167.8	170	29	29	103.3	48	268.5	185.3	170	28	28	120.8	46	5.2
DCR 04817(s)	1	256.7	173.5	170	33	33	110.8	60	270.7	187.5	170	33	33	124.8	58	5.2
DCR 04821(s)	1	259.5	176.3	170	38	38	115.8	73	272.5	189.3	170	31	31	128.8	71	5.2
DCR 0967(s)	2	379	295.8	310	17	17	90.3	27	401.5	318.3	310	16	16	112.8	25	6.6
DCR 0969(s)	2	9 382.4	299.2	310	22	22	94.3	34	403.9	320.7	2 310	19	19	115.8	32	6.6
DCR 09611(s)	2	384.8	301.6	310	25	25	97.3	42	406.3	323.1	310	24	24	118.8	39	6.6
DCR 09613(s)	2	390	306.8	310	29	29	103.3	48	407.5	324.3	310	28	28	120.8	46	6.6
DCR 09617(s)	2	395.7	312.5	310	33	33	110.8	60	409.7	326.5	310	33	33	124.8	58	6.6
DCR 09621(s)	2	398.5	315.3	310	38	38	115.8	73	411.5	328.3	310	34	34	128.8	71	6.6
DCR 1445(s)	3	526.9	443.7	310	12	12	96.8	21	543.9	460.7	310	12	12	112.8	19	7.8
DCR 1447(s)	3	521	437.8	310	17	17	90.3	27	543.5	460.3	310	17	17	112.8	25	7.8
DCR 1449(s)	3	521.4	441.2	310	22	22	94.3	34	545.9	462.7	310	20	20	115.8	32	7.8
DCR 14411(s)	3	526.8	443.6	310	25	25	97.3	42	548.3	465.1	310	25	25	118.8	39	7.8
DCR 14413(s)	3	532	448.8	310	29	29	103.3	48	549.5	466.3	310	29	29	120.8	46	7.8
DCR 14417(s)	3	537.7	454.5	310	33	33	110.8	60	551.7	468.5	310	34	34	124.8	58	7.8
DCR 14421(s)	3	540.5	457.3	310	38	38	115.8	73	553.5	470.3	310	34	34	128.8	71	7.8
DCR 1925(s)	4	666.9	583.7	310	12	12	96.8	21	683.9	600.7	310	12	12	112.8	19	9.1
DCR 1927(s)	4	661	577.8	310	17	17	90.3	27	683.5	600.3	310	17	17	112.8	25	9.1
DCR 1929(s)	4	664.4	581.2	310	22	22	94.3	34	685.9	602.7	310	20	20	115.8	32	9.1
DCR 19211(s)	4	666.8	583.6	310	25	25	97.3	42	688.3	605.1	310	25	25	118.8	39	9.1
DCR 19213(s)	4	672	588.8	310	29	29	103.3	48	689.5	606.3	310	29	29	120.8	46	9.1
DCR 19217(s)	4	677.7	594.5	310	33	33	110.8	60	691.7	608.5	310	34	34	124.8	58	9.1
DCR 19221(s)	4	680.5	597.3	310	38	38	115.8	73	693.5	610.3	310	34	34	128.8	71	9.1

⁽¹⁾ Without core. For total weight add 0.7 kg per core for 48-DM and 48-DC, 0.8 kg per core for 48-DA or 0.4 kg per strainer 48-F

Figure: DCRE housing


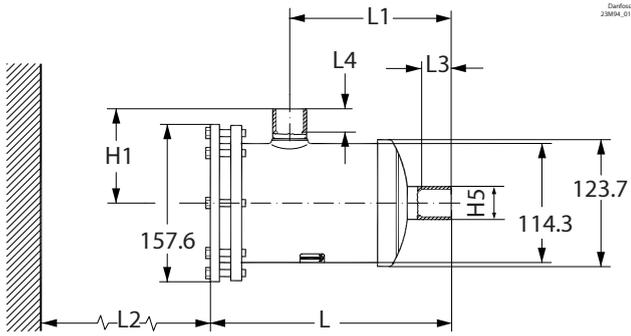


Figure: DCRE top cover

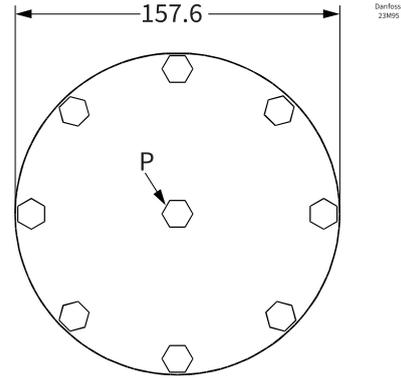

P Plug 1/4 in. NPT

Table: Dimensions and weights for DCRE

Type	No. of cores	DCRE with copper connectors							Net weight ⁽²⁾ [Kg]
		L	L1	L2	L3	L4	H1	H2	
		[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	
DCRE 0485(s)	1	232.6	161.4	170	10.6	10.6	110.45	16	5.92
DCRE 0487(s)	1	224.6	153.4	170	19	19	101.45	22.22	5.29
DCRE 0489(s)	1	231.7	160.5	170	22.5	22.5	108.45	28.58	5.55
DCRE 04811(s)	1	236.7	165.5	170	23.5	23.5	113.45	35	5.62
DCRE 04813(s)	1	239.7	168.5	170	27.5	27.5	116.45	41.28	5.88

⁽²⁾ Without core. For total weight add 0.7 kg per core for 48-DM and 48-DC, 0.8 kg per core for 48-DA or 0.4 kg per strainer 48-F

Connections

Table: Type of connector

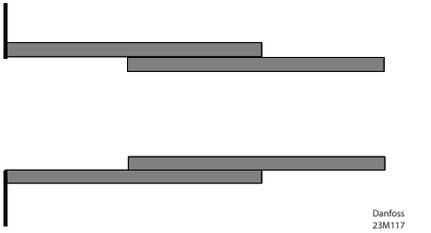
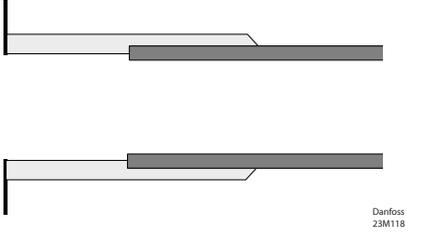
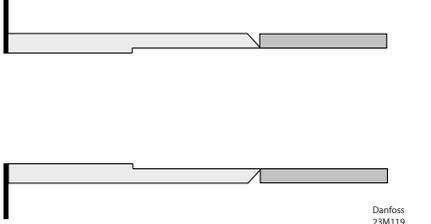
Connector	Connector type
	Copper ODF solder connector Copper pipe
	Steel ODF solder connector Copper pipe
	Steel butt weld connector Steel pipe

Table 3: Type of connector and recommended soldering material

Solder connector	Recommended soldering material
Copper	Min. 5% Ag
Steel	Silver-flo 55 + Easy-flow flux

Table: Type codes

Type	Code	Description
Filter drier	D	Drier
Solid core	C	Solid core
	R	Replaceable
	E	Flammable refrigerants
Size (volume)	48	48 in ³
	96	96 in ³
	144	144 in ³
	192	192 in ³
Connection (filter connection in 1/8 of an inch increments)	5	5/8 in. / 16 mm
	7	7/8 in. / 22 mm
	9	1 1/8 in. / 28 mm
	11	1 3/8 in. / 35 mm
	13	1 5/8 in. / 42 mm
	17	2 1/8 in. / 54 mm
	21	2 5/8 in.
Connection type	(blank)	Steel connectors
	s	Copper connectors

Certificates, declarations and approvals

The list contains all certificates, declarations, and approvals for this product type. Individual code number may have some or all of these approvals, and certain local approvals may not appear on the list.

When you click on the link you will be directed to the latest version of the 'Declaration of Conformity'. Products developed and sold before this date of issue conform to the directives/standards in force at the time of their sale.

Approval type	Title	Certification body	Approval topic
Pressure Safety Certificate	NSW PV 6-238701.19	NSW - New South Wales Government	
UK Declaration	Danfoss UK 023U9614.AB	Danfoss	
Pressure Safety Certificate	NSW PV 6-238699.19	NSW - New South Wales Government	
Mechanical Safety Certificate	UL SA6398-20240506 UL-CA	UL - Underwriters Laboratories inc.	
Pressure Safety Certificate	NSW PV 6-238700.19	NSW - New South Wales Government	
Manufacturer's Declaration	Danfoss MD 023U9611.AF	Danfoss	PED, Pressure, EU RoHS
Mechanical Safety Certificate	UL SA6398 19910806 US-CA	UL - Underwriters Laboratories inc.	
EU Declaration	Danfoss EU 023U9612.AF	Danfoss	PED, Pressure
Manufacturer's Declaration	Danfoss MD 023U9601.AA	Danfoss	China RoHS
EU Declaration	Danfoss EU 033F0685.AZ	Danfoss	EMC, PED, Pressure
Pressure Safety Certificate	LLC CDC EURO-TYSK UA.TR.089.1015.07-22	LLC CDC EURO TYSK - Ukraine	Pressure
Export Control Declaration	Filter Driers 023U and 023Z	Danfoss	
UA Declaration	Danfoss UA 2023-01-10 Filters PL01	Danfoss	PED, Pressure
Manufacturer's Declaration	Danfoss MD 023U9613.AG	Danfoss	PED, Pressure, EU RoHS, ATEX, Explosive
Pressure Safety Certificate	NSW PV 6-238702.19	NSW - New South Wales Government	
Mechanical Safety Certificate	UL SA6398 19980330 US-CA	UL - Underwriters Laboratories inc.	

Contact details

Online support

Danfoss offers a wide range of support along with our products, including digital information, software, mobile apps and expert guidance. See the possibilities below.



The Danfoss Design center

Discover the Design Center, our advanced digital platform that streamlines product selection. With integrated tools and enhanced type pages, it's simpler than ever to access product information and documentation, and to select the right products. Check the availability of Danfoss products at partner locations and enjoy seamless transitions from selection to purchase with our basket-to-basket functionality. Whether you're buying from our distributors or directly from the Product Store, the Design Center simplifies your experience. Learn more at: designcenter.danfoss.com.



The Danfoss product store

The Danfoss Product Store is a one-stop shop available 24/7 for our customers, no matter where you are in the world or what area of industry you work in. Browse our catalog, check product details and documentation, view your prices and product availability, and quickly finalize your purchase. Start browsing at: store.danfoss.com.



Danfoss Partner Portal/Product Data tool

Designed to support you with easy access to product data extracts, essential resources, tools, and information. The Partner Portal provides a centralized hub for product documentation, training materials, marketing assets, and technical support, ensuring you have everything you need to succeed and grow your business with Danfoss. The Partner Portal is available 24/7 at: partner.danfoss.com and is ready to support your business.



Find technical documentation

Find technical documentation you need to get your project up running. Get direct access to our official collection of data sheets, certificates and declarations, manuals and guides, 3D models and drawings, case stories, brochures, and much more. Start searching now at: documentation.danfoss.com.



Danfoss Learning

Danfoss Learning is a free online learning platform. It features courses and materials specifically designed to help engineers, installers, service technicians, and wholesalers better understand the products, applications industry topics, and trends that will help you do your job better. Find your local Danfoss website here: learning.danfoss.com.



Get local information and support

Local Danfoss websites are the main sources for help and information about our company and products. Find product availability, get the latest regional news, or connect with a nearby expert - all in your own language. Find your local Danfoss website here: danfoss.com.

Danfoss A/S

Climate Solutions . danfoss.com . +45 7488 2222

Any information, including, but not limited to information on selection of product, its application or use, product design, weight, dimensions, capacity or any other technical data in product manuals, catalogues description, advertisements, etc. and whether made available in writing, orally, electronically, online or via download, shall be considered informative, and is only binding if and to the extent, explicit reference is made in a quotation or order confirmation. Danfoss cannot accept any responsibility for possible errors in catalogues, brochures, videos and other material. Danfoss reserves the right to alter its products without notice. This also applies to products ordered but not delivered provided that such alterations can be made without changes to form, fit or function of the products. All trademarks in this material are property of Danfoss A/S or Danfoss group companies. Danfoss and the Danfoss logo are trademarks of Danfoss A/S. All rights reserved.
